



Havoline® Brake and Clutch Fluid DOT 4

Automotive Brake & Clutch Fluid

Product Data Sheet

Customer benefits

- **Maintains braking performance longer**
Higher boiling point, and the ability to retain boiling point in service, minimizes vapor formation at high temperatures, enabling braking performance to be maintained in service for longer than DOT 3 types.
- **Inventory savings**
Widespread suitability for different motor vehicles may provide inventory benefits. In addition, vehicle manufacturers are increasingly specifying this level of performance.
- **Protects metal surfaces**
Buffered formulation provides protection from acidic oxidation products for cast iron and steel components by maintaining the pH of the fluid in the alkaline range. Advanced technology inhibitors protect other metals such as aluminum, brass, copper, zinc and tin from corrosion by forming a protective layer on the surface.
- **Minimizes leakage and loss of pressure**
Correct seal swell and lubricity characteristics minimize leakage through seal shrinkage and component wear caused by excessive seal swelling and/or inadequate lubrication of moving parts.
- **Enhanced performance during service life**
High thermal and oxidation stability resists fluid degradation and formation of harmful deposits, enhancing the retention of key performance features over the full life of the fluid.


Product features:

Advanced, non-petroleum automotive brake fluid designed for use in conventional hydraulic brake and clutch systems, particularly in severe service conditions or where DOT4 fluids are recommended. Provides an additional safety margin against "vapor lock" compared with brake fluids meeting less stringent specification requirements.

A Chevron company product

All trademarks are property owned by Chevron Intellectual Property LLC.



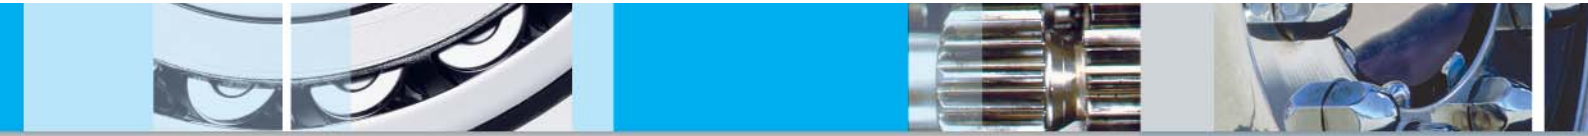

Applications

All hydraulically operated motor vehicle braking systems (drum and disc types) for which a DOT4 or SAE J1704 fluid is specified

This may include:

- Vehicles with anti-lock (ABS) braking systems
- Hydraulic clutch systems requiring conventional fluids
- Passenger cars, commercial road transport, and motorcycles
- Make-up or service fill of braking systems requiring SAE J1703 fluids. Make-up or service fill of braking systems requiring DOT 3 fluids, unless the OEM specifically recommends against the use of DOT4 fluids (e.g. certain Toyota models).

For vehicles operating in extreme service conditions, or where a DOT 5.1 fluid is specified, Caltex Brake and Clutch Fluid DOT 5.1 is recommended.

Not to be used in systems designed for mineral oil based fluids (LHM), e.g., certain Citroen models and many off-highway vehicles and tractors, or where Silicone-type DOT 5 fluids are recommended.

Performance Standards

Brake and Clutch Fluid DOT4 meets the requirements of the following specifications:

- U.S. Federal Motor Vehicle Safety Standard FMVSS No. 116 DOT4 and DOT 3
- SAE J1704 and SAE J1703
- ISO 4925 (Classes 3 & 4)
- JIS K2233-95 (Types 3 & 4)
- NATO specification H-542 (OX-8)



Havoline® Brake and Clutch Fluid DOT 4

Automotive Brake & Clutch Fluid

continued


Key Properties

HAVOLINE BRAKE AND CLUTCH FLUID DOT 4	RESULTS
Product Code	510668
FMVSS Grade	DOT 4
Color	Amber
Equilibrium Reflux Boiling Pt., °C	239
pH	8.5
Viscosity,	
mm ² /s @ -40°C	1315
mm ² /s @ 100°C	2.24

This bulletin was prepared in good faith from the best information available at the time of issue. While the values and characteristics are considered representative, some variation, not affecting performance, can be expected. It is the responsibility of the user to ensure that the products are used in the applications for which they are intended.

Produced by Chevron Lubricants; Africa, Middle East and Pakistan.

Environment, Health and Safety Information is available on this product in the Material Safety Data Sheet (MSDS) and Customer Safety Guide. Customers are encouraged to review this information, follow precautions and comply with laws and regulations concerning product use and disposal. To obtain a MSDS for this product, visit www.caltexoils.com.

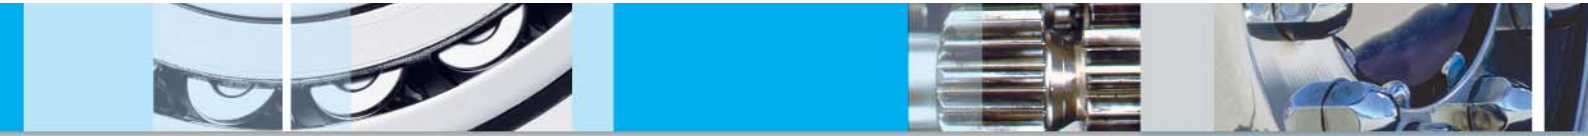

Service Considerations

Conventional brake fluids absorb moisture from the air. This lowers the boiling point of the fluid and reduces the margin of protection against “vapor lock”, a phenomenon which arises from the formation of vapor bubbles in the brake system and causes spongy pedal action or complete loss of braking effectiveness. Conditions conducive to vapor lock include frequent braking during long descents, towing heavy loads or binding brakes.

In order to minimize the amount of moisture absorbed, it is important that containers of brake fluid be kept tightly sealed and stored in a clean, dry location. Small containers should be used immediately after opening and then disposed of, along with any remaining contents.

In service, brake fluids slowly absorb moisture, both through the rubber brake hoses and also via the reservoir vent. For this reason, most vehicle manufacturers recommend regular changes of brake fluid at intervals varying from 12 to 36 months. Unless the vehicle manufacturer recommends otherwise, Chevron recommends that brake fluid is changed at 24 monthly intervals in order to avoid the danger of vapor lock outlined above.

Always change brake fluid in accordance with the vehicle manufacturer’s recommendations.

When changing brake fluid, it is critical that no contamination of the fluid occurs. Contact with even small quantities of dirt, solvents, or particularly petroleum based products (mineral oils, fuels, greases, etc.), may result in complete brake failure or costly repairs, while contamination with moisture can cause vapor lock in service. Absolute cleanliness is essential to avoid these problems.

Under no circumstances should Havoline Brake and Clutch Fluid DOT4 be mixed with any petroleum product, such as engine oil or hydraulic fluid. The use of brake fluid contaminated with mineral oil damages brake system seals which are specifically designed to be compatible with non-petroleum brake fluids, leading to leakage of the brake fluid and the compromise of brake system performance.

Havoline Brake and Clutch Fluid DOT4 is compatible with other brands of DOT 4/DOT 3 brake fluid, and may be used as make-up or service refill wherever DOT 4 or DOT 3 brake fluid is recommended, unless the OEM specifically recommends against the use of DOT4 fluids. Note that Toyota recommends against the use of DOT4 fluids in some of their current vehicle models, with a requirement for DOT 3 fluids instead. Chevron recommends that customers follow OEM guidelines.

For more information, go to www.chevronlubricants.com